

# SASSO 100 round wallwasher/floor

trim

048-2740619W 048-279631G 002-90776



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed  
 rotation 360°  
 gold , RAL260-M<sup>1</sup>  
 Mounting set white aluminium  
 IP20  
 2740 lm

## LED

4000 K  
 CRI ≥ 90  
 L80 / 50000 h  
 initial MacAdam ≤ 2 SDCM  
 R<sub>g</sub>: 97 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 89  
 MR 0.81  
 MDER 0.74

## Optical

wallwasher floor  
 PstLM ≤ 1.0<sup>2</sup>  
 SVM ≤ 0.4<sup>2</sup>

## Electrical

DALI-2  
 27.5 W  
 inset 23.4 W  
 36 Vf  
 700 mA  
 PC2 220-240V  
 100 lm/W  
 inset 117 lm/W

## Physical


trim  
 diameter 118 mm  
 height 96 mm  
 0.69 kg

## Cutout


diameter 108 mm  
 min. ceiling thickness 2 mm  
 max. ceiling thickness 25 mm  
 recessed depth 100 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

## Light distribution



## Product drawing

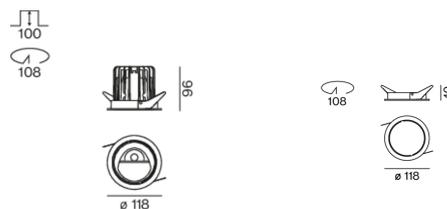

## Installation instructions



## Lighting calculator



[048-2740619W 048-279631G 002-90776] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

06.10.2024

1 / 1