

# SASSO 100 square wallwasher/floor

trim 2 lamps

048-2750414W 048-2799318 002-90774



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



## General

Ceiling , Recessed \_\_\_\_\_

matt silver \_\_\_\_\_

Mounting set jet black \_\_\_\_\_

IP20 \_\_\_\_\_

5060 lm \_\_\_\_\_

## LED

2700 K \_\_\_\_\_

CRI  $\geq$  90 \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam  $\leq$  2 SDCM \_\_\_\_\_

R<sub>g</sub>: 99 , R<sub>r</sub>: 91 , R<sub>t(1-15)</sub>: 89 \_\_\_\_\_

MR 0.53 \_\_\_\_\_

MDER 0.48 \_\_\_\_\_

## Optical

wallwasher floor \_\_\_\_\_

PstLM  $\leq$  1.0 <sup>1</sup> \_\_\_\_\_

SVM  $\leq$  0.4 <sup>1</sup> \_\_\_\_\_

## Electrical

non DIM \_\_\_\_\_

system 55 W \_\_\_\_\_

inset 23.4 W \_\_\_\_\_

36 Vf \_\_\_\_\_

700 mA \_\_\_\_\_

total insets 47 W \_\_\_\_\_

PC2 220-240V \_\_\_\_\_

system 92 lm/W<sup>2</sup> \_\_\_\_\_

inset 108 lm/W<sup>3</sup> \_\_\_\_\_

## Physical

trim \_\_\_\_\_

length 218 mm \_\_\_\_\_

width 118 mm \_\_\_\_\_

height 96 mm \_\_\_\_\_

0.75 kg \_\_\_\_\_

## Cutout

length 210 mm \_\_\_\_\_

width 112 mm \_\_\_\_\_

min. ceiling thickness 2 mm \_\_\_\_\_

max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 100 mm \_\_\_\_\_


<sup>1</sup> Value of containing product at full load (undimmed)

<sup>2</sup> incl. optical losses and the efficiency of the operating device (converter)


<sup>3</sup> incl. optical losses

Recessed square spotlight in die-cast aluminium; 2 lamps; surface matt silver; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam  $\leq$  2 SDCM; CRI  $\geq$  90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

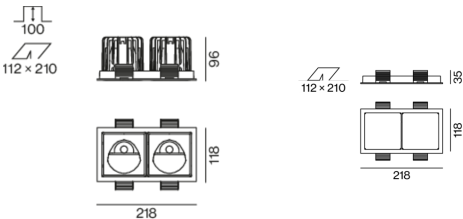

## Installation instructions



## Lighting calculator



[‘048-2750414W 048-2799318 002-90774’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · [www.xal.com](http://www.xal.com)