

SASSO 100 round wallwasher/floor

trim

048-2740514W 048-279631G 002-90776



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed
rotation 360°
matt silver
Mounting set white aluminium
IP20
2690 lm

LED

3000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R_g: 100 , R_f: 91 , R_{f(1-5)}: 88
MR 0.59
MDER 0.53

Optical

wallwasher floor
PstLM ≤ 1.0 ¹
SVM ≤ 0.4 ¹

Electrical

DALI-2
system 27.5 W
inset 23.4 W
36 Vf
700 mA
PC2 220-240V
system 98 lm/W²
inset 115 lm/W³


Physical

trim
diameter 118 mm
height 96 mm
0.69 kg


Cutout

diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

Light distribution



Product drawing

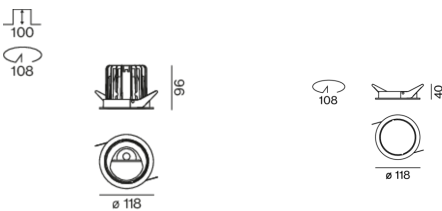

¹ Value of containing product at full load (undimmed)
² incl. optical losses and the efficiency of the operating device (converter)
³ incl. optical losses

Installation instructions



Lighting calculator

