

# SASSO 100 round wallwasher/floor

trim

048-2740517W 048-2796317 002-90777



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

rotation 360°

white , RAL9016 <sup>1</sup>

Mounting set traffic white

IP20

1990 lm

system 104 lm/W<sup>2</sup>

fixture 122 lm/W<sup>2</sup>

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 91 , R<sub>{1-15}</sub>: 88

MR 0.59

MDER 0.53

Optical

wallwasher floor

PstLM ≤ 1.0 <sup>3</sup>

SVM ≤ 0.4 <sup>3</sup>

Electrical

non DIM

220-240 V

system 19.2 W

fixture 16.3 W

36 Vf

500 mA

PC2

Physical

trim

diameter 118 mm

height 96 mm

0.67 kg

Cutout


diameter 108 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 100 mm

## Light distribution



## Product drawing

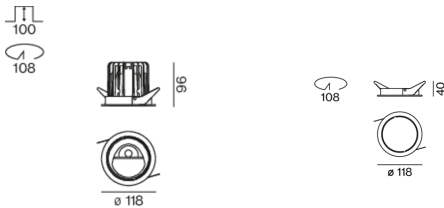

<sup>1</sup> RAL code  
<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.  
<sup>3</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator

