

SASSO 100 round wallwasher

trimless

048-2740514A 048-2796117 002-90776



Project / Type

Notes

Count / Date



General
Ceiling , Recessed
rotation 360°
matt silver
Mounting set traffic white
IP20
2050 lm

LED
3000 K
CRI ≥ 90
L70 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 97 , R _f : 91 , R _{1-15} : 89
MR 0.6
MDER 0.54

Optical
wallwasher
PstLM ≤ 1.0 ¹
SVM ≤ 0.4 ¹


Electrical
DALI-2
29.4 W
inset 25.0 W
36 Vf
350 mA
PC2 220-240V
70 lm/W
inset 82 lm/W

Physical
trimless
diameter 105 mm
height 96 mm
0.71 kg


Cutout
diameter 106 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 120 mm

Round recessed spotlight in die-cast aluminium; 1 lamp; surface matt silver; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 70% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

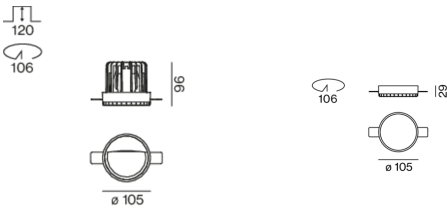

¹ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

