

SASSO 100 round wallwasher/floor

trim

048-2740417W 048-2796317 002-90776



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

rotation 360° _____

white , RAL9016 ¹ _____

Mounting set traffic white _____

IP20 _____

2530 lm _____

LED

2700 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89 _____

MR 0.53 _____

MDER 0.48 _____

Optical

wallwasher floor _____

PstLM ≤ 1.0 ² _____

SVM ≤ 0.4 ² _____

Electrical

DALI-2 _____

system 27.5 W _____

inset 23.4 W _____

36 Vf _____

700 mA _____

PC2 220-240V _____

system 92 lm/W³ _____

inset 108 lm/W⁴ _____

Physical

trim _____

diameter 118 mm _____

height 96 mm _____

0.69 kg _____

Cutout


diameter 108 mm _____

min. ceiling thickness 2 mm _____


max. ceiling thickness 25 mm _____

recessed depth 100 mm _____

Light distribution



Product drawing

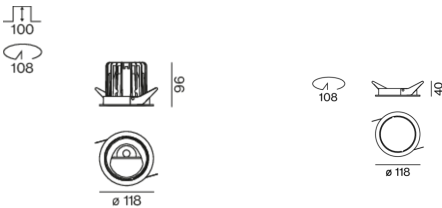

¹ RAL code ² Value of containing product at full load (undimmed)

³ incl. optical losses and the efficiency of the operating device (converter)

⁴ incl. optical losses

Installation instructions



Lighting calculator

