

SASSO 100 round wallwasher/floor

trim

048-2740414W 048-279631G 002-90779



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

rotation 360° _____

matt silver _____

Mounting set white aluminium _____

IP20 _____

1870 lm _____

LED

2700 K _____

CRI \geq 90 _____

L80 / 50000 h _____

initial MacAdam \leq 2 SDCM _____

R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89 _____

MR 0.53 _____

MDER 0.48 _____

Optical

wallwasher floor _____

PstLM \leq 1.0 ¹ _____

SVM \leq 0.4 ¹ _____

Electrical

DALI-2 _____

19.2 W _____

inset 16.3 W _____

36 Vf _____

500 mA _____

PC2 220-240V _____

97 lm/W² _____

inset 114 lm/W³ _____

Physical

trim _____

diameter 118 mm _____

height 96 mm _____

0.7 kg _____

Cutout

diameter 108 mm _____

min. ceiling thickness 2 mm _____

max. ceiling thickness 25 mm _____


recessed depth 100 mm _____

¹ Value of containing product at full load (undimmed)


² incl. optical losses and the efficiency of the operating device (converter)

³ incl. optical losses

Light distribution



Product drawing

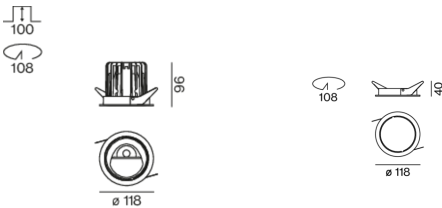

Installation instructions



Lighting calculator

