

# SASSO 100 square downlight

trim

048-2710514S 048-279731G 002-90776



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



## General

Ceiling , Recessed \_\_\_\_\_

trim matt silver \_\_\_\_\_

Mounting set white aluminium \_\_\_\_\_

front IP44 , back IP20 \_\_\_\_\_

1990 lm \_\_\_\_\_

## LED

3000 K \_\_\_\_\_

CRI  $\geq 90$  \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam  $\leq 2$  SDCM \_\_\_\_\_

$R_g: 100, R_f: 91, R_{f(1-15)}: 88$  \_\_\_\_\_

MR 0.59 \_\_\_\_\_

MDER 0.53 \_\_\_\_\_

## Optical

spot \_\_\_\_\_

beam angle  $20^\circ$  \_\_\_\_\_

UGR  $< 16, \geq 65^\circ < 3000 \text{ cd/m}^2$  \_\_\_\_\_

PstLM  $\leq 1.0^1$  \_\_\_\_\_

SVM  $\leq 0.4^1$  \_\_\_\_\_

## Electrical

DALI-2 \_\_\_\_\_

29.2 W \_\_\_\_\_

inset 24.8 W \_\_\_\_\_

36 Vf \_\_\_\_\_

700 mA \_\_\_\_\_

PC2 220-240V \_\_\_\_\_

68 lm/W \_\_\_\_\_

inset 80 lm/W \_\_\_\_\_

1 DALI Addr. \_\_\_\_\_

## Physical

trim \_\_\_\_\_

length 118 mm \_\_\_\_\_

width 118 mm \_\_\_\_\_

height 75 mm \_\_\_\_\_

0.53 kg \_\_\_\_\_

## Cutout

length 112 mm \_\_\_\_\_

width 112 mm \_\_\_\_\_

min. ceiling thickness 2 mm \_\_\_\_\_


max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 80 mm \_\_\_\_\_


<sup>1</sup> Value of containing product at full load (undimmed)

Recessed square spotlight in die-cast aluminium; 1 lamp; surface matt silver; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with  $20^\circ$  beam; UGR  $\leq 16$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above  $65^\circ \leq 3000 \text{ cd/m}^2$ ; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

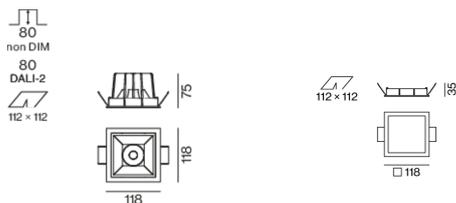

## Installation instructions



## Lighting calculator

