

SASSO 100 square downlight

trim

048-2710419W 048-279731G 002-90779



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

gold , RAL260-M ¹ _____

Mounting set white aluminium _____

front IP44 , back IP20 _____

1620 lm _____

LED

2700 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89 _____

MR 0.53 _____

MDER 0.48 _____

Optical

wide flood _____

beam angle 65° _____

≥65° <1500 cd/m² _____

PstLM ≤ 1.0 ² _____

SVM ≤ 0.4 ² _____

Electrical

DALI-2 _____

20.2 W _____

inset 17.2 W _____

36 Vf _____

500 mA _____

PC2 220-240V _____

80 lm/W _____

inset 94 lm/W _____

1 DALI Addr. _____

Physical

trim _____

length 118 mm _____

width 118 mm _____

height 75 mm _____

0.54 kg _____

Cutout

length 112 mm _____

width 112 mm _____


min. ceiling thickness 2 mm _____

max. ceiling thickness 25 mm _____


recessed depth 80 mm _____

¹ RAL code ² Value of containing product at full load (undimmed)

Light distribution



Product drawing

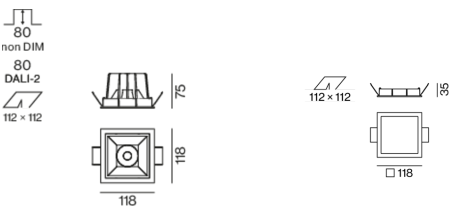

Installation instructions



Lighting calculator



[‘048-2710419W 048-279731G 002-90779’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com