

SASSO 100 round downlight

trimless

048-2700619M 048-2796117 002-90779



Project / Type _____

Notes _____

Count / Date _____



↑ P20
↓ P44

220-240V

X-PERT

UGR
≤ 13

cd/m²
≤ 3000

CRI
≥ 90

MACOS
MAGOR

X-PERT

General

Ceiling , Recessed

gold , RAL260-M ¹

Mounting set traffic white

front IP44 , back IP20

1540 lm

LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 97 , R_f: 90 , R_{t(1-15)}: 89

MR 0.81

MDER 0.74

Optical

medium

beam angle 33°

UGR < 13 , ≥ 65° < 3000 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

20.2 W

inset 17.2 W

36 Vf

500 mA

PC2 220-240V

76 lm/W

inset 89 lm/W

1 DALI Addr.

Physical

trimless

diameter 105 mm

height 75 mm

0.53 kg

Cutout

diameter 106 mm


min. ceiling thickness 12.5 mm

max. ceiling thickness 25 mm


recessed depth 80 mm

¹ RAL code ² Value of containing product at full load (undimmed)

Light distribution



Product drawing

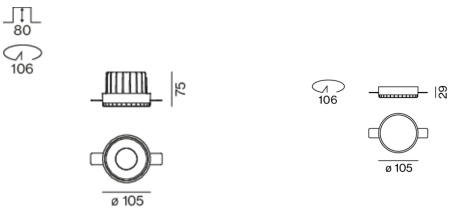

Installation instructions



Lighting calculator



[048-2700619M 048-2796117 002-90779] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com