

SASSO 100 round downlight

trimless

048-2700511W 048-2796117 002-90777



Project / Type _____

Notes _____

Count / Date _____



IP20
IP44

220-240V

X-PERT

UGR
≤22

cd/m²
≤1500

CRI
≥90

X-PERT

General

Ceiling , Recessed

black , RAL9005 ¹

Mounting set traffic white

front IP44 , back IP20

1630 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 100 , R_f: 91 , R₍₁₋₁₅₎: 88

MR 0.59

MDER 0.53

Optical

wide flood

beam angle 65°

≥65° <1500 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

non DIM

20.2 W

inset 17.2 W

36 Vf

500 mA

PC2 220-240V

81 lm/W

inset 95 lm/W

Physical

trimless

diameter 105 mm

height 75 mm

0.49 kg

Cutout

diameter 106 mm


min. ceiling thickness 12.5 mm

max. ceiling thickness 25 mm


recessed depth 80 mm

¹ RAL code ² Value of containing product at full load (undimmed)

Light distribution



Product drawing

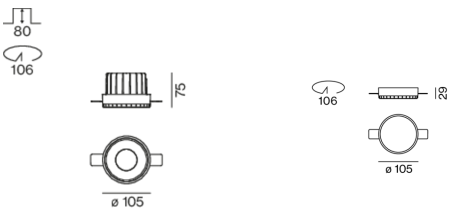

Installation instructions



Lighting calculator

