

SASSO 100 round downlight

trimless

048-2700519M 048-2796117 002-90777



Project / Type _____

Notes _____

Count / Date _____



IP20
IP44

220-240V

X-PERT

UGR
≤13

cd/m²
≤3000

CRI
≥90

X-PERT

General

Ceiling , Recessed

gold , RAL260-M ¹

Mounting set traffic white

front IP44 , back IP20

1450 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 100 , R_f: 91 , R_{f(1-15)}: 88

MR 0.59

MDER 0.53

Optical

medium

beam angle 33°

UGR < 13 , ≥65° <3000 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

non DIM

20.2 W

inset 17.2 W

36 Vf

500 mA

PC2 220-240V

72 lm/W

inset 85 lm/W

Physical

trimless

diameter 105 mm

height 75 mm

0.49 kg

Cutout


diameter 106 mm

min. ceiling thickness 12.5 mm


max. ceiling thickness 25 mm

recessed depth 80 mm

Light distribution



Product drawing

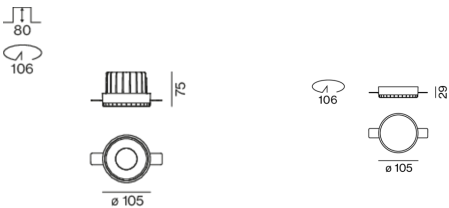

¹ RAL code ² Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

