

# SASSO 100 round downlight

trim

048-2700517M 048-279631G 002-90779



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed  
white , RAL9016 <sup>1</sup>  
Mounting set white aluminium  
front IP44 , back IP20  
1490 lm

## LED

3000 K  
CRI ≥ 90  
L80 / 50000 h  
initial MacAdam ≤ 2 SDCM  
R<sub>g</sub>: 100 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 88  
MR 0.59  
MDER 0.53

## Optical

medium  
beam angle 33°  
UGR < 19  
PstLM ≤ 1.0 <sup>2</sup>  
SVM ≤ 0.4 <sup>2</sup>

## Electrical

DALI-2  
20.2 W  
inset 17.2 W  
36 Vf  
500 mA  
PC2 220-240V  
74 lm/W  
inset 87 lm/W  
1 DALI Addr.

## Physical

trim  
diameter 118 mm  
height 75 mm  
0.5 kg


## Cutout

diameter 108 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 80 mm


<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

Round recessed spotlight in die-cast aluminium; 1 lamp; surface white; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 33° beam; UGR ≤ 19; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

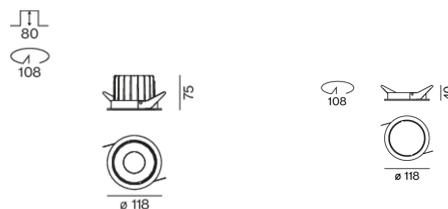

## Installation instructions



## Lighting calculator

