

SASSO 100 round downlight

trimless

048-2700411S 048-2796117 002-90774



Project / Type _____

Notes _____

Count / Date _____



↑ IP20
↓ IP44

220-240V

X-PERT

UGR
≤13

cd/m²
≤3000

CRI
≥90

X-PERT

General

Ceiling , Recessed
black , RAL9005 ¹
Mounting set traffic white
front IP44 , back IP20
1730 lm

LED

2700 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89
MR 0.53
MDER 0.48

Optical

spot
beam angle 19°
UGR < 13 , ≥65° <3000 cd/m²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

non DIM
29.2 W
inset 24.8 W
36 Vf
700 mA
PC2 220-240V
59 lm/W
inset 70 lm/W


Physical

trimless
diameter 105 mm
height 75 mm
0.47 kg


Cutout

diameter 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

Light distribution



Product drawing

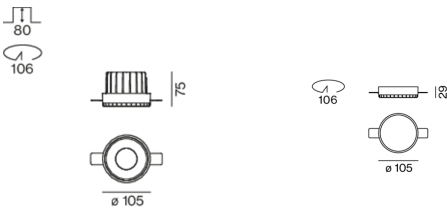

¹ RAL code ² Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

