

# SASSO 60 emergency light pro

trimless

048-2693231 048-2696117



Project / Type

Notes

Count / Date



### General

Ceiling , Recessed

rotation 360°

black , RAL 9005 <sup>1</sup>

Mounting set traffic white

IP20

206<sup>2</sup>, 208<sup>3</sup>, 217<sup>4</sup> lm

### LED

6500 K

CRI ≥ 80

### Optical

emergency light

beam angle 21°<sup>2</sup>, 103°x25°<sup>3</sup>, 149°x150°<sup>4</sup>

### Electrical

220-240 V

system 1.0 W

system 206<sup>2</sup>, 208<sup>3</sup>, 217<sup>4</sup> lm/W<sup>5</sup>

PC2

### Physical

trimless

diameter 73 mm

height 94 mm

0.32 kg

### Cutout


diameter 73 mm

recessed depth 110 mm


<sup>1</sup> RAL code <sup>2</sup> Spot lens <sup>3</sup> Escape route lens <sup>4</sup> Anti panic lens  
<sup>5</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Round LED emergency light inset; surface lacquered in black; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; incl. 3 interchangeable lenses: anti panic / escape route / spot; incl. 3h rechargeable battery; Pro DALI with monitoring via DALI; light colour 6500 K; CRI ≥ 80; degree of protection IP20; PC2; light source not replaceable;

### Light distribution

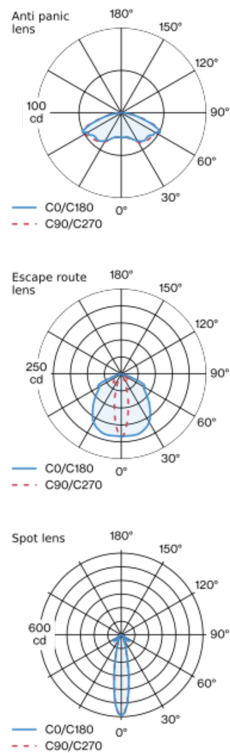

### Product drawing

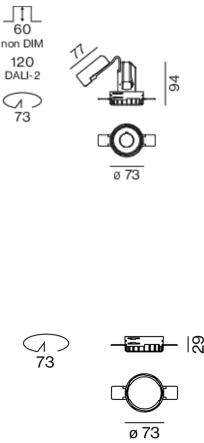

### Installation instructions



### Lighting calculator



[“048-2693231 048-2696117”] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com