

SASSO 60 emergency light pro

trimless

048-2693231 048-2696117



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

rotation 360°

black , RAL 9005 ¹

Mounting set traffic white

IP20

206², 208³, 217⁴ lm

LED

6500 K

CRI ≥ 80

Optical

emergency light

beam angle 21°², 103°x25°³, 149°x150°⁴

Electrical

220-240 V

system 1.0 W

system 206², 208³, 217⁴ lm/W⁵

PC2

Physical

trimless

diameter 73 mm

height 94 mm

0.32 kg

Cutout


diameter 73 mm

recessed depth 110 mm


¹ RAL code ² Spot lens ³ Escape route lens ⁴ Anti panic lens
⁵ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Round LED emergency light inset; surface lacquered in black; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; incl. 3 interchangeable lenses: anti panic / escape route / spot; incl. 3h rechargeable battery; Pro DALI with monitoring via DALI; light colour 6500 K; CRI ≥ 80; degree of protection IP20; PC2; light source not replaceable;

Light distribution

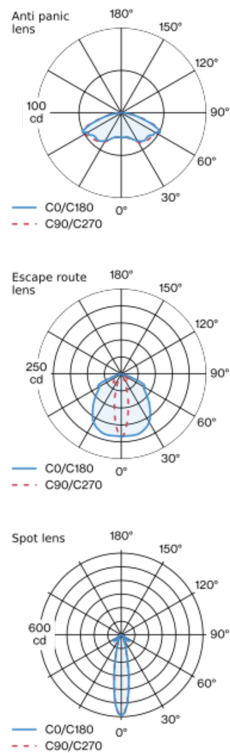

Product drawing

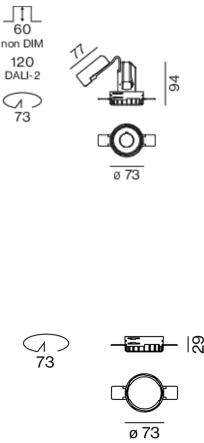

Installation instructions



Lighting calculator



[“048-2693231 048-2696117”] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

SASSO 60

emergency light

pro

trimless

048-2693231 048-2696117



Project / Type

Notes

Count / Date

Components

MOUNTING SET trimless

TYPE	COLOUR	Ø (MM)	ARTICLE NUMBER(S)
for plasterboard ceilings 12.5/15/25 mm	traffic white	73	048-2696117



Mounting accessories

PRIMED CONCRETE MOUNTING HOUSING

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
white aluminium	614-307-120	048-2695110



Electrical accessories

REPLACEMENT ACCUPACK

TYPE	ARTICLE NUMBER(S)
3h battery life	048-2693910

