

SASSO 60 emergency light basic

trim

048-2693217 048-2696317



Project / Type


Notes

Count / Date



Round LED emergency light inset; surface lacquered in white; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; incl. 3 interchangeable lenses: anti panic / escape route / spot; incl. 3h rechargeable battery; with test button; light colour 6500 K; CRI ≥ 80; degree of protection IP20; PC2 220-240V; light source not replaceable;

Light distribution

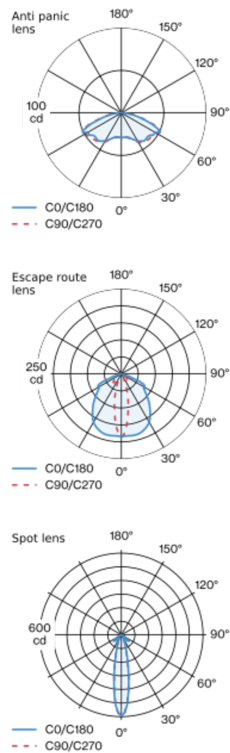

Product drawing



General

Ceiling , Recessed

rotation 360°

white , RAL9016 ¹

Mounting set traffic white

IP20

206², 208³, 217⁴ lm

LED

6500 K

CRI ≥ 80

Optical

emergency light

beam angle 21°², 103°x25°³, 149°x150°⁴

Electrical

system 1.0 W

inset 1.0 W

200 mA

PC2 220-240V

system 206², 208³, 217⁴ lm/W⁵

inset 206², 208³, 217⁴ lm/W⁶

Physical

trim

diameter 80 mm

height 94 mm

0.27 kg

Cutout

diameter 73 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 110 mm

¹ RAL code ² Spot lens ³ Escape route lens ⁴ Anti panic lens
⁵ incl. optical losses and the efficiency of the operating device (converter)
⁶ incl. optical losses

Installation instructions



Lighting calculator



SASSO 60 emergency light basic

trim
048-2693217 048-2696317



Project / Type

Notes

Count / Date

Components

MOUNTING SET with trim 1 lamp

TYPE	COLOUR	Ø (MM)	ARTICLE NUMBER(S)
for intermediate ceilings	traffic white	80	048-2696317



Mounting accessories

PRIMED CONCRETE MOUNTING HOUSING

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
white aluminium	614-307-120	048-2695110



Electrical accessories

REPLACEMENT ACCUPACK

TYPE	ARTICLE NUMBER(S)
3h battery life	048-2693910

