

SASSO 60 square wallwasher/floor

trim 2 lamps

048-2651517W 048-269931G 002-90762



Project / Type

Notes

Count / Date



General

Ceiling , Recessed
white , RAL9016 ¹
Mounting set white aluminium
IP20
1630 lm

LED

3000 K
CRI \geq 90
L80 / 50000 h
initial MacAdam \leq 3 SDCM
R_g: 97 , R_f: 91 , R_{f(1-15)}: 89
MR 0.6
MDER 0.54

Optical

wallwasher floor
PstLM \leq 1.0 ²
SVM \leq 0.4 ²

Electrical

DALI-2
220-240 V
system 19.4 W
inset 8.3 W
27 Vf
300 mA
total insets 16.5 W
PC2
system 84 lm/W³
inset 99 lm/W³
1 DALI Addr.

Physical


trim
length 147 mm
width 81 mm
height 49 mm
0.21 kg

Cutout


length 138 mm
width 73 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

Recessed square spotlight in die-cast aluminium; 2 lamps; surface white; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 3000 K; binning initial MacAdam \leq 3 SDCM; CRI \geq 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

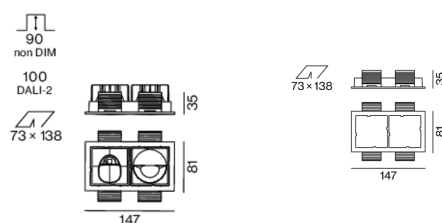

SASSO 60 square wallwasher/floor

trim 2 lamps

048-2651517W 048-269931G 002-90762



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

