

SASSO 60 round wallwasher/floor

trim 2 lamps

048-2641619W 048-2698318 002-90762



Project / Type _____


Notes _____

Count / Date _____




Round recessed spotlight in die-cast aluminium; 2 lamps; surface gold; 360° rotatable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2 220-240V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

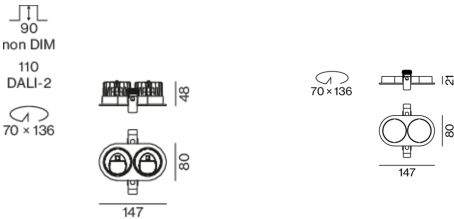

General

Ceiling , Recessed
rotation 360°
gold , RAL260-M ¹
Mounting set jet black
IP20
1600 lm

LED

4000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 3 SDCM
R_g: 94 , R_f: 87 , R_{f(1-15)}: 86
MR 0.8
MDER 0.72

Optical

wallwasher floor
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

DALI-2
system 19.4 W
inset 8.3 W
27 Vf
300 mA
total insets 16.5 W
PC2 220-240V
system 82 lm/W³
inset 97 lm/W⁴
1 DALI Addr.

Physical

trim
length 147 mm
width 80 mm
height 48 mm
0.34 kg

Cutout

diameter 70 mm
length 70 mm
width 136 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 110 mm

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses



SASSO 60 round wallwasher/floor

trim 2 lamps

048-2641619W 048-2698318 002-90762



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

