

# SASSO 60 round wallwasher

trimless exposed concrete

048-2641611A 048-2695210 002-90771



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed  
 rotation 360°  
 black , RAL9005 <sup>1</sup>  
 Mounting set white aluminium  
 IP20  
 700 lm

## LED

4000 K  
 CRI ≥ 90  
 L80 / 50000 h  
 initial MacAdam ≤ 3 SDCM  
 R<sub>g</sub>: 94 , R<sub>f</sub>: 87 , R<sub>f(1-15)</sub>: 86  
 MR 0.8  
 MDER 0.72

## Optical

wallwasher  
 PstLM ≤ 1.0 <sup>2</sup>  
 SVM ≤ 0.4 <sup>2</sup>

## Electrical

non DIM  
 system 9.7 W  
 inset 8.3 W  
 27 Vf  
 300 mA  
 PC2 220-240V  
 system 72 lm/W<sup>3</sup>  
 inset 85 lm/W<sup>4</sup>

## Physical


trimless for exposed concrete ceiling  
 length 230 mm  
 width 230 mm  
 height 162 mm  
 2.35 kg

## Cutout


recessed depth 60 mm

Round recessed spotlight in die-cast aluminium; 1 lamp; surface black; 360° rotatable; installation without tools in mounting set due to patented ball catch system; concrete housings for exposed concrete ceilings; for trimless installation; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2 220-240V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

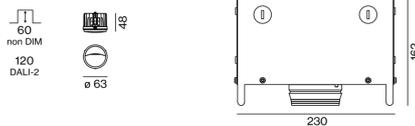

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>4</sup> incl. optical losses

## Installation instructions



## Lighting calculator

