

# SASSO 60 round wallwasher/floor

trimless

048-2641519W 048-2696117 002-90762



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

rotation 360°

gold , RAL260-M <sup>1</sup>

Mounting set traffic white

IP20

798 lm

## LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 97 , R<sub>f</sub>: 91 , R<sub>{1-15}</sub>: 89

MR 0.6

MDER 0.54

## Optical

wallwasher floor

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrical

DALI-2

220-240 V

system 9.7 W

inset 8.3 W

27 Vf

300 mA

PC2

system 82 lm/W<sup>3</sup>

inset 97 lm/W<sup>3</sup>

1 DALI Addr.

## Physical

trimless

diameter 73 mm

height 48 mm

0.28 kg

## Cutout

diameter 73 mm

recessed depth 120 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)


## Installation instructions




## Lighting calculator



## Light distribution



## Product drawing

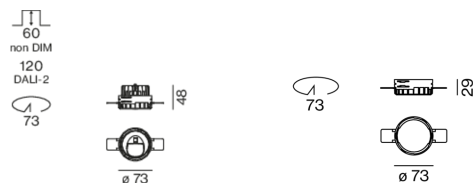

[048-2641519W 048-2696117 002-90762] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

04.02.2025

1 / 1