

SASSO 60 round adjustable

trim 2 lamps

048-2622E11F 048-2698318 002-90762



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

tilt max 30°

rotation 360°

black , RAL 9005 ¹

Mounting set jet black

front IP40 , back IP20

1340 lm

fixture 66 lm/W²

LED

colour warm dimming

1800 K - 3000 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 101 , R_r: 94 , R_{f(1-15)}: 96

MR 0.64

MDER 0.58

Optical

flood

beam angle 36°

UGR ≤ 19

PstLM ≤ 1.0 ³

SVM ≤ 0.4 ³

Electrical

DALI-2

220-240 V

system 24.0 W

fixture 10.2 W

300 mA

fixture 20.4 W

PC2

1 DALI Addr.

Physical

trim

length 147 mm

width 80 mm

height 48 mm

0.21 kg

Cutout

diameter 70 mm

length 70 mm

width 136 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 110 mm

¹ RAL code


² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

³ Value of containing product at full load (undimmed)

Light distribution



Product drawing

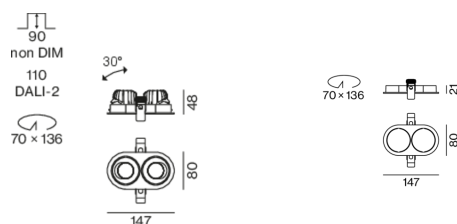

SASSO 60 round adjustable

trim 2 lamps

048-2622E11F 048-2698318 002-90762



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator

