

SASSO 60 round
wallwasher

trimless

048-2641511A 048-2696117 002-90771



Project / Type

Notes

Count / Date



General
Ceiling , Recessed
rotation 360°
black , RAL9005 ¹
Mounting set traffic white
IP20
700 lm

LED
3000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 97 , R _f : 91 , R _{1-15} : 89
MR 0.6
MDER 0.54

Optical
wallwasher
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²


Electrical
non DIM
system 9.7 W
inset 8.3 W
27 Vf
300 mA
PC2 220-240V
system 72 lm/W ³
inset 85 lm/W ⁴

Physical
trimless
diameter 73 mm
height 48 mm
0.22 kg


Cutout
diameter 73 mm
recessed depth 60 mm

Round recessed spotlight in die-cast aluminium; 1 lamp; surface black; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2 220-240V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

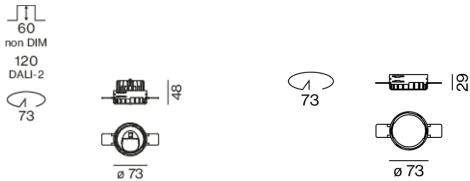

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

Installation instructions



Lighting calculator

