

# SASSO 60 round wallwasher/floor

trimless

048-2641419W 048-2696117 002-90762



Project / Type

Notes

Count / Date



General
Ceiling , Recessed
rotation 360°
gold , RAL260-M <sup>1</sup>
Mounting set traffic white
IP20
739 lm

LED
2700 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 3 SDCM
R <sub>g</sub> : 97 , R <sub>f</sub> : 91 , R <sub>{1-15}</sub> : 90
MR 0.53
MDER 0.48

Optical
wallwasher floor
PstLM ≤ 1.0 <sup>2</sup>
SVM ≤ 0.4 <sup>2</sup>


Electrical
DALI-2
9.7 W
inset 8.3 W
27 Vf
300 mA
PC2 220-240V
76 lm/W
inset 90 lm/W
1 DALI Addr.

Physical
trimless
diameter 73 mm
height 48 mm
0.28 kg


Cutout
diameter 73 mm
recessed depth 120 mm

Round recessed spotlight in die-cast aluminium; 1 lamp; surface gold; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2 220-240V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

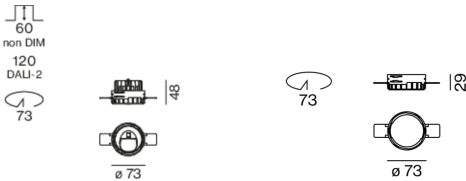

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator

