

# SASSO 60 round adjustable

trim 2 lamps

048-2622E14M 048-2698318 002-90762



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

tilt max 30°

rotation 360°

matt silver

Mounting set jet black

front IP40 , back IP20

1560 lm

fixture 76 lm/W<sup>1</sup>

## LED

colour warm dimming

1800 K - 3000 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 101 , R<sub>r</sub>: 94 , R<sub>f(1-15)</sub>: 96

MR 0.64

MDER 0.58

## Optical

medium

beam angle 26°

UGR < 19

PstLM ≤ 1.0<sup>2</sup>

SVM ≤ 0.4<sup>2</sup>

## Electrical

DALI-2

220-240 V

system 24.0 W

fixture 10.2 W

300 mA

fixture 20.4 W

PC2

1 DALI Addr.

## Physical

trim

length 147 mm

width 80 mm

height 48 mm

0.3 kg

## Cutout

diameter 70 mm

length 70 mm

width 136 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 110 mm


<sup>1</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

<sup>2</sup> Value of containing product at full load (undimmed)

## Light distribution



## Product drawing

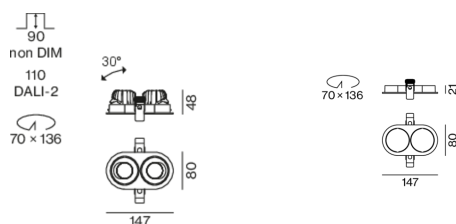

# SASSO 60 round adjustable

trim 2 lamps

048-2622E14M 048-2698318 002-90762



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator

