

# SASSO 60 square downlight

trim 2 lamps

048-2612E17M 048-269931G 002-90762



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

white , RAL9016 <sup>1</sup>

Mounting set white aluminium

front IP40 , back IP20

1590 lm

## LED

colour warm dimming

1800 K - 3000 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 101 , R<sub>r</sub>: 94 , R<sub>t(1-5)</sub>: 96

MR 0.64

MDER 0.58

## Optical

medium

beam angle 26°

UGR < 19

P<sub>stLM</sub> ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrical

DALI-2

220-240 V

system 24.0 W

inset 10.2 W

300 mA

total insets 20.4 W

PC2

system 66 lm/W<sup>3</sup>

inset 78 lm/W<sup>3</sup>

1 DALI Addr.

## Physical

trim

length 147 mm

width 81 mm

height 48 mm

0.21 kg

## Cutout

length 138 mm

width 73 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 100 mm


<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

## Light distribution



## Product drawing

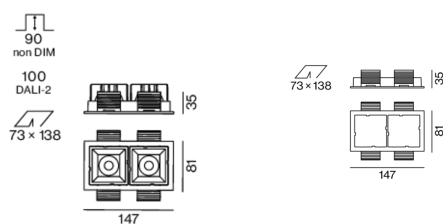

# SASSO 60 square downlight

trim 2 lamps

048-2612E17M 048-269931G 002-90762



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

