

# SASSO PRO 100

## adjustable offset trim square

048-2412638W 052-1952418



Project / Type

Notes

Count / Date



### General

Ceiling , Recessed

tilt max 35°

rotation 360°

black , RAL 9005 <sup>1</sup>

Mounting set jet black

IP20

2210 lm

### LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 97 , R<sub>r</sub>: 89 , R<sub>(1-15)</sub>: 91

MR 0.85

MDER 0.77

### Optical

wide flood

beam angle 57°

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

DALI-2

220-240 V

system 27.0 W

system 82 lm/W<sup>3</sup>

PC2

1 DALI Addr.

### Physical

trim

length 112 mm

width 112 mm

height 106 mm

0.59 kg

### Cutout


diameter 108 mm

min. ceiling thickness 5 mm


max. ceiling thickness 25 mm

recessed depth 130 mm

### Light distribution



### Product drawing

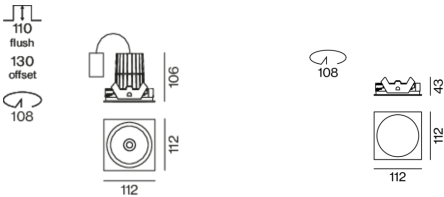

[‘048-2412638W 052-1952418’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · [www.xal.com](http://www.xal.com)