


SASSO PRO 100

adjustable offset trim round

048-2412638M 052-1932448



Project / Type _____
 Notes _____
 Count / Date _____

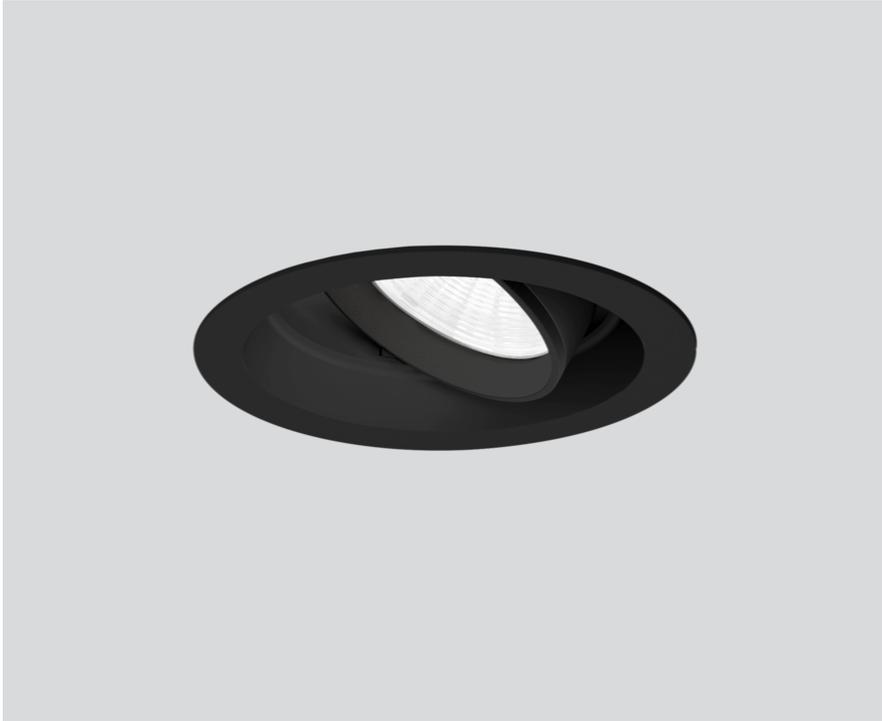

General

Ceiling , Recessed
 tilt max 35°
 rotation 360°
 black , RAL 9005 ¹
 Mounting set jet black
 IP20
 2330 lm

LED

4000 K
 CRI ≥ 90
 L80 / 50000 h
 initial MacAdam ≤ 3 SDCM
 R_g: 97 , R_r: 89 , R₍₁₋₁₅₎: 91
 MR 0.85
 MDER 0.77

Optical

medium
 beam angle 24°
 P_{stLM} ≤ 1.0 ²
 SVM ≤ 0.4 ²

Electrical

DALI-2
 220-240 V
 system 27.0 W
 system 86 lm/W³
 PC2
 1 DALI Addr.

Physical


trim
 diameter 112 mm
 height 106 mm
 0.59 kg

Cutout

diameter 108 mm
 min. ceiling thickness 5 mm
 max. ceiling thickness 25 mm
 recessed depth 130 mm

Round recessed spotlight in die-cast aluminium with recessed luminaire plane; surface black powder coated; 360° rotatable and 35° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim jet black; suitable for ceiling thickness of 5-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality reflector made of plastic with spherical reflector; aluminium, vapour deposition coated; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 24° beam; installed and exchanged without tools; optical attachments available as accessories; accessories are listed separately; degree of protection IP20; PC2; 220-240 V; incl. DALI-2 converter; converter wired secondary side; through wiring connection box, 3-pole or 5-pole, available as an accessory; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution



medium 24°

h (m)	E0° (lx)	ø (m)
1	9130	0.43
2	2280	0.87
3	1010	1.30
4	570	1.73
5	370	2.17

Product drawing

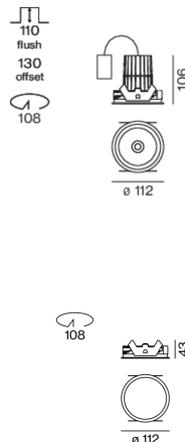

¹ RAL code ² Value of containing product at full load (undimmed)

³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator

