

SASSO PRO 100

adjustable flush trim round

048-2413437F 052-1922448



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed
 tilt max 35°
 rotation 360°
 white , RAL9016 ¹
 Mounting set jet black
 IP20
 2580 lm

LED

2700 K
 CRI ≥ 90
 L90 / 50000 h
 initial MacAdam ≤ 3 SDCM
 R_g: 101, R_r: 94, R_{1-15}: 95
 MR 0.55
 MDER 0.5

Optical

flood
 beam angle 39°
 P_{stLM} ≤ 1.0 ²
 SVM ≤ 0.4 ²

Electrical

DALI-2
 system 27.0 W
 PC2 220-240V
 system 96 lm/W³
 inset 112 lm/W⁴
 1 DALI Addr.

Physical

trim
 diameter 112 mm
 height 106 mm
 0.6 kg


Cutout

diameter 108 mm
 min. ceiling thickness 5 mm
 max. ceiling thickness 25 mm
 recessed depth 110 mm

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

Round recessed spotlight in die-cast aluminium; surface white powder coated; 360° rotatable and 35° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim jet black; suitable for ceiling thickness of 5-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality reflector made of plastic with spherical reflector; aluminium, vapour deposition coated; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 39° beam; installed and exchanged without tools; optical attachments available as accessories; accessories are listed separately; degree of protection IP20; PC2 220-240V; incl. DALI-2 converter; converter wired secondary side; through wiring connection box, 3-pole or 5-pole, available as an accessory; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution



flood 39°

h (m)	E0° (lx)	ø (m)
1	5490	0.71
2	1370	1.42
3	610	2.13
4	340	2.84
5	220	3.54

Product drawing

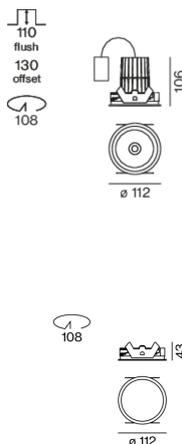

Installation instructions



Lighting calculator

