

SASSO PRO 100

adjustable offset trim square

048-2412437W 052-1952418



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed	
tilt max 35°	
rotation 360°	
white , RAL 9016 ¹	
Mounting set jet black	
IP20	
2070 lm	

LED

2700 K	
CRI ≥ 90	
L85 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R _g : 100 , R _f : 89 , R _{f(1-15)} : 86	
MR 0.49	
MDER 0.44	

Optical

wide flood	
beam angle 57°	
PstLM ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Electrical

DALI-2	
220-240 V	
system 27.0 W	
system 77 lm/W ³	
PC2	
1 DALI Addr.	


Physical

trim	
length 112 mm	
width 112 mm	
height 106 mm	
0.59 kg	


Cutout

diameter 108 mm	
min. ceiling thickness 5 mm	
max. ceiling thickness 25 mm	
recessed depth 130 mm	

Light distribution



Product drawing

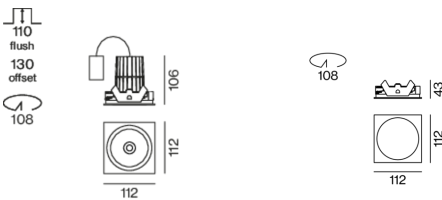

¹ RAL code ² Value of containing product at full load (undimmed)
³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator

