

SASSO PRO 100

adjustable flush trim square

048-2412518W 052-1942417




| | |
|----------------|--|
| Project / Type | |
| Notes | |
| Count / Date | |




Round recessed spotlight in die-cast aluminium; surface black powder coated; 360° rotatable and 35° tiltale; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim traffic white; suitable for ceiling thickness of 5-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality reflector made of plastic with spherical reflector; aluminium, vapour deposition coated; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 57° beam; installed and exchanged without tools; optical attachments available as accessories; accessories are listed separately; degree of protection IP20; PC2; 220-240 V; incl. converter, non dimmable; converter wired secondary side; through wiring connection box, 3-pole or 5-pole, available as an accessory; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

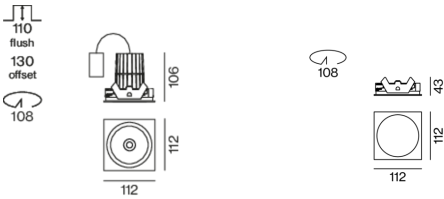

General

| | |
|-------------------------------|--|
| Ceiling , Recessed | |
| tilt max 35° | |
| rotation 360° | |
| black , RAL 9005 ¹ | |
| Mounting set traffic white | |
| IP20 | |
| 2090 lm | |

LED

| | |
|---|--|
| 3000 K | |
| CRI ≥ 90 | |
| L85 / 50000 h | |
| initial MacAdam ≤ 3 SDCM | |
| R _g : 100 , R _f : 89 , R ₍₁₋₁₅₎ : 89 | |
| MR 0.56 | |
| MDER 0.51 | |

Optical

| | |
|---------------------------------------|--|
| wide flood | |
| beam angle 57° | |
| $\geq 65^\circ < 3000 \text{ cd/m}^2$ | |
| PstLM ≤ 1.0 ² | |
| SVM ≤ 0.4 ² | |

Electrical

| | |
|-----------------------------|--|
| non DIM | |
| 220-240 V | |
| system 27.0 W | |
| system 77 lm/W ³ | |
| PC2 | |

Physical

| | |
|---------------|--|
| trim | |
| length 112 mm | |
| width 112 mm | |
| height 106 mm | |
| 0.62 kg | |

Cutout

| | |
|------------------------------|--|
| diameter 108 mm | |
| min. ceiling thickness 5 mm | |
| max. ceiling thickness 25 mm | |
| recessed depth 110 mm | |

¹ RAL code ² Value of containing product at full load (undimmed)
³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator



SASSO PRO 100

adjustable flush trim square

048-2412518W 052-1942417



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|---|--------|--------|
| LLMF | 0.96 | 0.94 | 0.91 | 0.89 | 0.86 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a Room Surface Maintenance Factor | | |
| MF | Maintenance Factor | | LLMF Lamp Lumens Maintenance Factor | | |
| LMF ^a | Luminaire Maintenance Factor | | LSF Lamp Survival Faktor | | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 20 |
| B16 | 32 |
| C10 | 33 |
| C16 | 53 |

Components

MOUNTING SET

| TYPE | COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|--------------|---------------|------------|-------------------|
| square flush | traffic white | 112-112-43 | 052-1942417 |



Mounting accessories

THROUGH WIRING CONNECTION BOX

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|--|------------|-------------------|
| non DIM cable ø 4 – 12 mm, Linect®-Ready | 105-58-30 | 005-2531110 |
| DALI cable ø 4 – 12 mm, Linect®-Ready | 105-58-30 | 005-2551110 |



Mounting accessories

PRIMED CONCRETE MOUNTING HOUSING

| L-W-H (MM) | ARTICLE NUMBER(S) |
|-------------|-------------------|
| 240-400-130 | 052-1914420 |



[048-2412518W 052-1942417] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

06.04.2025

2 / 3

SASSO PRO 100

adjustable flush trim square

048-2412518W 052-1942417



Project / Type

Notes

Count / Date

Optical accessories

HONEYCOMB LOUVER

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 74 | 048-2191317 |
| jet black | 74 | 048-2191318 |



LINEAR PRISMATIC LENS

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 74 | 048-2192317 |
| jet black | 74 | 048-2192318 |



SNOOT

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 74 | 048-2191117 |
| jet black | 74 | 048-2191118 |



SNOOT WITH HONEYCOMB LOUVER

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 74 | 048-2191217 |
| jet black | 74 | 048-2191218 |

