

# SASSO PRO 100

## adjustable flush trim square

048-2412437W 052-1942417



Project / Type	
Notes	
Count / Date	



General
Ceiling , Recessed
tilt max 35°
rotation 360°
white , RAL9016 <sup>1</sup>
Mounting set traffic white
IP20
2070 lm

LED
2700 K
CRI ≥ 90
L85 / 50000 h
initial MacAdam ≤ 3 SDCM
R <sub>g</sub> : 100 , R <sub>f</sub> : 89 , R <sub>f(1-15)</sub> : 86
MR 0.49
MDER 0.44


Optical
wide flood
beam angle 57°
PstLM ≤ 1.0 <sup>2</sup>
SVM ≤ 0.4 <sup>2</sup>

Electrical
DALI-2
system 27.0 W
PC2 220-240V
system 77 lm/W <sup>3</sup>
inset 90 lm/W <sup>4</sup>
1 DALI Addr.


Physical
trim
length 112 mm
width 112 mm
height 106 mm
0.62 kg

Cutout
diameter 108 mm
min. ceiling thickness 5 mm
max. ceiling thickness 25 mm
recessed depth 110 mm

### Light distribution



### Product drawing

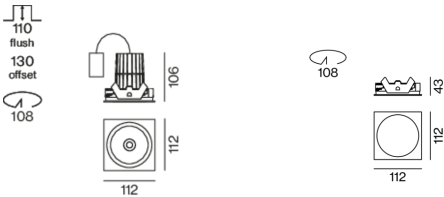

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses

### Installation instructions



### Lighting calculator

