

SASSO PRO 100

adjustable offset trim round

048-2412L38F 052-1932448



Project / Type _____


Notes _____

Count / Date _____



Round recessed spotlight in die-cast aluminium with recessed luminaire plane; surface black powder coated; 360° rotatable and 35° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim jet black; suitable for ceiling thickness of 5-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour: tunable white diodes (1800-3000 K); binning initial MacAdam ≤ 3 SDCM; CRI ≥ 92 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality reflector made of plastic with spherical reflector; aluminium, vapour deposition coated; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 38° beam; installed and exchanged without tools; optical attachments available as accessories; accessories are listed separately; degree of protection IP20; PC2; 220-240 V; incl. DALI-2 / DT8 converter; converter wired secondary side; through wiring connection box, 3-pole or 5-pole, available as an accessory; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution



flood 38°

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1 | 3980 | 0.69 |
| 2 | 1000 | 1.38 |
| 3 | 440 | 2.07 |
| 4 | 250 | 2.76 |
| 5 | 160 | 3.45 |

Product drawing

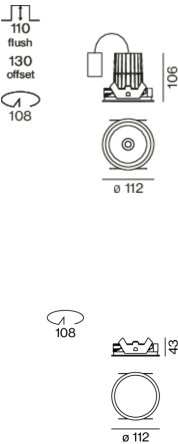

General

Ceiling , Recessed
tilt max 35°
rotation 360°
black , RAL 9005 ¹
Mounting set jet black
IP20
1780 lm

LED

tunable white
1800 K - 3000 K
CRI ≥ 92
L85 / 50000 h
initial MacAdam ≤ 3 SDCM
R_g: 101 , R_r: 94 , R_{t1-15}: 96
MR 0.64
MDER 0.58

Optical

flood
beam angle 38°
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

DALI-2 DT8
220-240 V
system 29.7 W
system 60 lm/W³
PC2
2 DALI Addr.

Physical

trim
diameter 112 mm
height 106 mm
0.59 kg

Cutout

diameter 108 mm
min. ceiling thickness 5 mm
max. ceiling thickness 25 mm
recessed depth 130 mm

¹ RAL code ² Value of containing product at full load (undimmed)
³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator



SASSO PRO 100

adjustable offset trim round

048-2412L38F 052-1932448



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|---|--------|--------|
| LLMF | 0.96 | 0.94 | 0.91 | 0.89 | 0.86 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a Room Surface Maintenance Factor | | |
| MF | Maintenance Factor | | LLMF Lamp Lumens Maintenance Factor | | |
| LMF ^a | Luminaire Maintenance Factor | | LSF Lamp Survival Faktor | | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 18 |
| B16 | 30 |
| C10 | 23 |
| C16 | 36 |

Components

MOUNTING SET

| TYPE | COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|--------------------|-----------|--------|-------------------|
| round offset 17 mm | jet black | 112 | 052-1932448 |



Mounting accessories

THROUGH WIRING CONNECTION BOX

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|--|------------|-------------------|
| non DIM cable ø 4 – 12 mm, Linect®-Ready | 105-58-30 | 005-2531110 |
| DALI cable ø 4 – 12 mm, Linect®-Ready | 105-58-30 | 005-2551110 |



Mounting accessories

PRIMED CONCRETE MOUNTING HOUSING

| L-W-H (MM) | ARTICLE NUMBER(S) |
|-------------|-------------------|
| 240-400-130 | 052-1914420 |



SASSO PRO 100

adjustable offset trim round

048-2412L38F 052-1932448



Project / Type

Notes

Count / Date

Optical accessories

HONEYCOMB LOUVER

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 74 | 048-2191317 |
| jet black | 74 | 048-2191318 |



LINEAR PRISMATIC LENS

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 74 | 048-2192317 |
| jet black | 74 | 048-2192318 |



SNOOT

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 74 | 048-2191117 |
| jet black | 74 | 048-2191118 |



SNOOT WITH HONEYCOMB LOUVER

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 74 | 048-2191217 |
| jet black | 74 | 048-2191218 |

