

# SASSO PRO 100

## adjustable offset trim round

048-2412L37F 052-1932448



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



### General

Ceiling , Recessed \_\_\_\_\_

tilt max 35° \_\_\_\_\_

rotation 360° \_\_\_\_\_

white , RAL 9016 <sup>1</sup> \_\_\_\_\_

Mounting set jet black \_\_\_\_\_

IP20 \_\_\_\_\_

1830 lm \_\_\_\_\_

### LED

tunable white \_\_\_\_\_

1800 K - 3000 K \_\_\_\_\_

CRI ≥ 92 \_\_\_\_\_

L85 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 3 SDCM \_\_\_\_\_

R<sub>g</sub>: 101 , R<sub>r</sub>: 94 , R<sub>t1-15</sub>: 96 \_\_\_\_\_

MR 0.64 \_\_\_\_\_

MDER 0.58 \_\_\_\_\_

### Optical

flood \_\_\_\_\_

beam angle 38° \_\_\_\_\_

PstLM ≤ 1.0 <sup>2</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>2</sup> \_\_\_\_\_

### Electrical

DALI-2 DT8 \_\_\_\_\_

220-240 V \_\_\_\_\_

system 29.7 W \_\_\_\_\_

system 62 lm/W<sup>3</sup> \_\_\_\_\_

PC2 \_\_\_\_\_

2 DALI Addr. \_\_\_\_\_

### Physical

trim \_\_\_\_\_

diameter 112 mm \_\_\_\_\_

height 106 mm \_\_\_\_\_

0.59 kg \_\_\_\_\_

### Cutout


diameter 108 mm \_\_\_\_\_

min. ceiling thickness 5 mm \_\_\_\_\_

max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 130 mm \_\_\_\_\_


### Light distribution



flood 38°

h (m)	E0° (lx)	ø (m)
1	4010	0.69
2	1000	1.38
3	450	2.07
4	250	2.76
5	160	3.45

### Product drawing

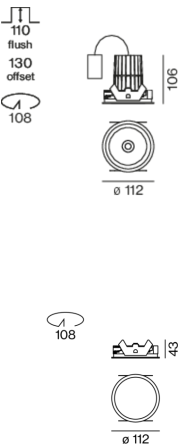

### Installation instructions



### Lighting calculator

