

SASSO PRO 100

adjustable offset trim round

048-2412438W 052-1932448



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

tilt max 35° _____

rotation 360° _____

black , RAL9005 ¹ _____

Mounting set jet black _____

IP20 _____

2000 lm _____

LED

2700 K _____

CRI ≥ 90 _____

L85 / 50000 h _____

initial MacAdam ≤ 3 SDCM _____

R_g: 100 , R_f: 89 , R_{f(1-15)}: 86 _____

MR 0.49 _____

MDER 0.44 _____

Optical

wide flood _____

beam angle 57° _____

≥65° <3000 cd/m² _____

PstLM ≤ 1.0 ² _____

SVM ≤ 0.4 ² _____

Electrical

DALI-2 _____

system 27.0 W _____

PC2 220-240V _____

system 74 lm/W³ _____

inset 87 lm/W⁴ _____

1 DALI Addr. _____

Physical

trim _____

diameter 112 mm _____

height 106 mm _____

0.59 kg _____

Cutout

diameter 108 mm _____


min. ceiling thickness 5 mm _____

max. ceiling thickness 25 mm _____


recessed depth 130 mm _____

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

Light distribution



Product drawing

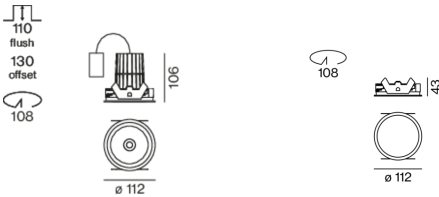

Installation instructions



Lighting calculator

