

# SASSO PRO 100

## adjustable

flush trimless

048-2412417W 052-1921447



Project / Type	
Notes	
Count / Date	



### General

Ceiling , Recessed
tilt max 35°
rotation 360°
white , RAL 9016 <sup>1</sup>
IP20
2070 lm

### LED

2700 K
CRI ≥ 90
L85 / 50000 h
initial MacAdam ≤ 3 SDCM
R <sub>g</sub> : 100 , R <sub>f</sub> : 89 , R <sub>f(1-15)</sub> : 86
MR 0.49
MDER 0.44

### Optical

wide flood
beam angle 57°
PstLM ≤ 1.0 <sup>2</sup>
SVM ≤ 0.4 <sup>2</sup>

### Electrical

non DIM
220-240 V
system 27.0 W
system 77 lm/W <sup>3</sup>
PC2

### Physical


trimless
length 105 mm
width 113 mm
height 106 mm
0.64 kg

### Cutout


diameter 116 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 110 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

### Light distribution



### Product drawing

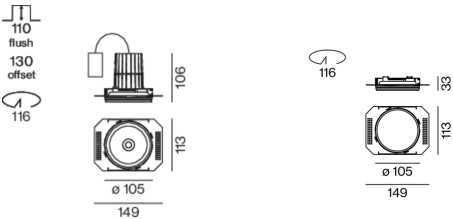

### Installation instructions



### Lighting calculator

