

SASSO PRO 100

adjustable flush trim square

048-2410637W 052-1942417



Project / Type	
Notes	
Count / Date	



--	--	--	--

General
Ceiling , Recessed
tilt max 35°
rotation 360°
white , RAL9016 ¹
Mounting set traffic white
IP20
1420 lm

LED
4000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 97 , R _r : 89 , R ₍₁₋₁₅₎ : 91
MR 0.85
MDER 0.77


Optical
wide flood
beam angle 57°
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical
DALI-2
system 14.7 W
PC2 220-240V
system 97 lm/W ³
inset 114 lm/W ⁴
1 DALI Addr.


Physical
trim
length 112 mm
width 112 mm
height 106 mm
0.62 kg

Cutout
diameter 108 mm
min. ceiling thickness 5 mm
max. ceiling thickness 25 mm
recessed depth 110 mm

Light distribution



Product drawing

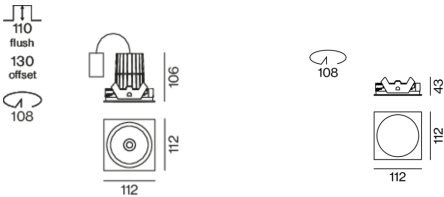

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

Installation instructions



Lighting calculator

