

SASSO PRO 100

adjustable flush trim square

048-2411E38F 052-1942417



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed
 tilt max 35°
 rotation 360°
 black , RAL9005 ¹
 Mounting set traffic white
 IP20
 853 lm

LED

colour warm dimming
 2000 K - 3000 K
 CRI ≥ 95
 L80 / 50000 h
 initial MacAdam ≤ 4 SDCM
 R_g: 100 , R_f: 91 , R_{t(1-15)}: 90
 MR 0.61
 MDER 0.55

Optical

flood
 beam angle 36°
 P_{stLM} ≤ 1.0 ²
 SVM ≤ 0.4 ²

Electrical

DALI-2
 system 14.9 W
 PC2 220-240V
 system 57 lm/W³
 inset 68 lm/W⁴
 1 DALI Addr.

Physical

trim
 length 112 mm
 width 112 mm
 height 106 mm
 0.62 kg


Cutout

diameter 108 mm
 min. ceiling thickness 5 mm
 max. ceiling thickness 25 mm
 recessed depth 110 mm

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

Round recessed spotlight in die-cast aluminium; surface black powder coated; 360° rotatable and 35° tiltable; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim traffic white; suitable for ceiling thickness of 5-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; CWD (Colour Warm Dimming) of 2000K - 3000K; binning initial MacAdam ≤ 4 SDCM; CRI ≥ 95; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality reflector made of plastic with spherical reflector; aluminium, vapour deposition coated; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 36° beam; installed and exchanged without tools; optical attachments available as accessories; accessories are listed separately; degree of protection IP20; PC2 220-240V; incl. DALI-2 converter; converter wired secondary side; with colour warm dimming a step-less change of colour temperature occurs simultaneously with a reduction in light intensity; similar to the dimming characteristic of an incandescent lamp; reducing the illuminance enables a very warm tone; through wiring connection box, 3-pole or 5-pole, available as an accessory; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution



flood 36°

h (m)	E0° (lx)	ø (m)
1	2120	0.65
2	530	1.31
3	240	1.96
4	130	2.61
5	80	3.27

Product drawing

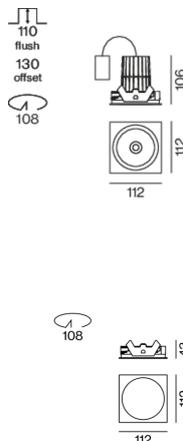

Installation instructions



Lighting calculator



[048-2411E38F 052-1942417] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

21.11.2024