

# SASSO PRO 100

## adjustable flush trim square

048-2410537W 052-1942417



Project / Type

Notes

Count / Date



### General

Ceiling , Recessed

tilt max 35°

rotation 360°

white , RAL9016 <sup>1</sup>

Mounting set traffic white

IP20

1340 lm

### LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 89 , R<sub>(1-15)</sub>: 89

MR 0.56

MDER 0.51

### Optical

wide flood

beam angle 57°

P<sub>stLM</sub> ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

DALI-2

system 14.7 W

PC2 220-240V

system 91 lm/W<sup>3</sup>

inset 107 lm/W<sup>4</sup>

1 DALI Addr.

### Physical

trim

length 112 mm

width 112 mm

height 106 mm

0.62 kg

### Cutout


diameter 108 mm

min. ceiling thickness 5 mm


max. ceiling thickness 25 mm

recessed depth 110 mm

### Light distribution



### Product drawing

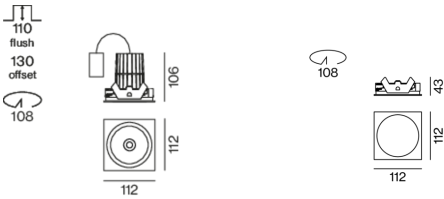

### Installation instructions



### Lighting calculator

