

SASSO PRO 100

adjustable flush trim square

048-2410537W 052-1942417



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed	
tilt max 35°	
rotation 360°	
white , RAL 9016 ¹	
Mounting set traffic white	
IP20	
1340 lm	

LED

3000 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R _g : 100 , R _f : 89 , R _{f(1-15)} : 89	
MR 0.56	
MDER 0.51	

Optical

wide flood	
beam angle 57°	
P _{stLM} ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Electrical

DALI-2	
220-240 V	
system 14.7 W	
system 91 lm/W ³	
PC2	
1 DALI Addr.	


Physical

trim	
length 112 mm	
width 112 mm	
height 106 mm	
0.62 kg	


Cutout

diameter 108 mm	
min. ceiling thickness 5 mm	
max. ceiling thickness 25 mm	
recessed depth 110 mm	

Light distribution



Product drawing

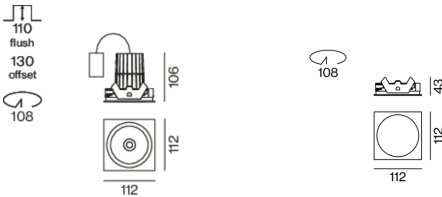

Installation instructions



Lighting calculator

