

SASSO PRO 100

adjustable flush trim square

048-2410537M 052-1942417



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

tilt max 35°

rotation 360°

white , RAL9016 ¹

Mounting set traffic white

IP20

1410 lm

LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 100 , R_f: 89 , R₍₁₋₁₅₎: 89

MR 0.56

MDER 0.51

Optical

medium

beam angle 24°

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

system 14.7 W

PC2 220-240V

system 96 lm/W³

inset 113 lm/W⁴

1 DALI Addr.

Physical

trim

length 112 mm

width 112 mm

height 106 mm

0.62 kg

Cutout


diameter 108 mm

min. ceiling thickness 5 mm

max. ceiling thickness 25 mm

recessed depth 110 mm


Light distribution



medium 24°

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1 | 5400 | 0.43 |
| 2 | 1350 | 0.87 |
| 3 | 600 | 1.30 |
| 4 | 340 | 1.73 |
| 5 | 220 | 2.17 |

Product drawing

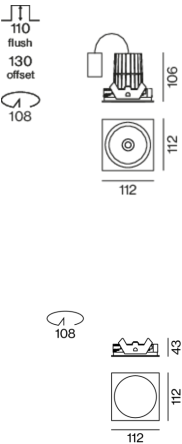

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

Installation instructions



Lighting calculator

