

SASSO PRO 80 adjustable

flush trimless

048-2312618F 052-1921327



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed	
tilt max 35°	
rotation 360°	
black , RAL9005 ¹	
Mounting set traffic white	
IP20	
1080 lm	

LED

4000 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R _g : 97 , R _r : 89 , R ₍₁₋₁₅₎ : 91	
MR 0.85	
MDER 0.77	

Optical

flood	
beam angle 37°	
P _{stLM} ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Electrical

non DIM	
system 12.2 W	
PC2 220-240V	
system 89 lm/W ³	
inset 104 lm/W ⁴	

Physical

trimless	
length 87 mm	
width 92 mm	
height 83 mm	
0.46 kg	


Cutout

diameter 95 mm	
min. ceiling thickness 12.5 mm	
max. ceiling thickness 25 mm	
recessed depth 110 mm	

Light distribution



Product drawing

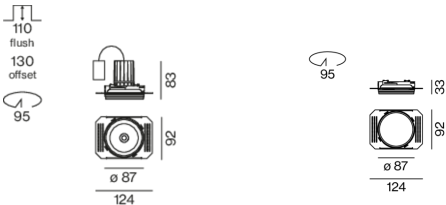

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

Installation instructions



Lighting calculator

