

# SASSO PRO 80 adjustable

flush trimless

048-2312538M 052-1921327




Project / Type	
Notes	
Count / Date	




Round recessed spotlight in die-cast aluminium; surface black powder coated; 360° rotatable and 35° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality reflector made of plastic with spherical reflector; aluminium, vapour deposition coated; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 26° beam; installed and exchanged without tools; optical attachments available as accessories; accessories are listed separately; degree of protection IP20; PC2 220-240V; incl. DALI-2 converter; converter wired secondary side; through wiring connection box, 3-pole or 5-pole, available as an accessory; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

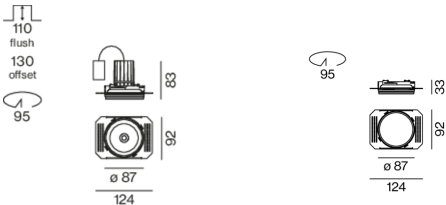

## General

Ceiling , Recessed	
tilt max 35°	
rotation 360°	
black , RAL9005 <sup>1</sup>	
Mounting set traffic white	
IP20	
1000 lm	

## LED

3000 K	
CRI $\geq 90$	
L90 / 50000 h	
initial MacAdam $\leq 3$ SDCM	
R <sub>g</sub> : 100 , R <sub>f</sub> : 89 , R <sub>f(1-15)</sub> : 89	
MR 0.56	
MDER 0.51	

## Optical

medium	
beam angle 26°	
$\geq 65^\circ < 3000 \text{ cd/m}^2$	
PstLM $\leq 1.0$ <sup>2</sup>	
SVM $\leq 0.4$ <sup>2</sup>	

## Electrical

DALI-2	
system 12.2 W	
PC2 220-240V	
system 82 lm/W <sup>3</sup>	
inset 96 lm/W <sup>4</sup>	

## Physical

trimless	
length 87 mm	
width 92 mm	
height 83 mm	
0.46 kg	

## Cutout

diameter 95 mm	
min. ceiling thickness 12.5 mm	
max. ceiling thickness 25 mm	
recessed depth 110 mm	

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses

## Installation instructions



## Lighting calculator

