

# SASSO PRO 100

## adjustable

offset trimless

048-2410418W 052-1931447




Project / Type	
Notes	
Count / Date	




Round recessed spotlight in die-cast aluminium with recessed luminaire plane; surface black powder coated; 360° rotatable and 35° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing traffic white; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality reflector made of plastic with spherical reflector; aluminium, vapour deposition coated; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 57° beam; installed and exchanged without tools; optical attachments available as accessories; accessories are listed separately; degree of protection IP20; PC2; 220-240 V; incl. converter, non dimmable; converter wired secondary side; through wiring connection box, 3-pole or 5-pole, available as an accessory; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

### Light distribution



### Product drawing

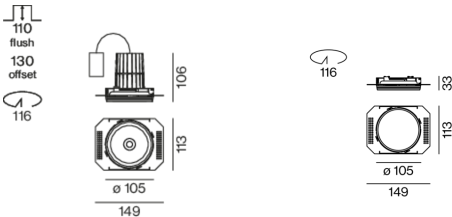

### General

Ceiling , Recessed	
tilt max 35°	
rotation 360°	
black , RAL 9005 <sup>1</sup>	
Mounting set traffic white	
IP20	
1240 lm	

### LED

2700 K	
CRI $\geq 90$	
L90 / 50000 h	
initial MacAdam $\leq 3$ SDCM	
R <sub>g</sub> : 100 , R <sub>f</sub> : 89 , R <sub>f(1-15)</sub> : 86	
MR 0.49	
MDER 0.44	

### Optical

wide flood	
beam angle 57°	
UGR $\leq 19$ , $\geq 65^\circ$ <3000 cd/m <sup>2</sup>	
PstLM $\leq 1.0$ <sup>2</sup>	
SVM $\leq 0.4$ <sup>2</sup>	

### Electrical

non DIM	
220-240 V	
system 14.7 W	
system 84 lm/W <sup>3</sup>	
PC2	

### Physical

trimless	
length 105 mm	
width 113 mm	
height 106 mm	
0.63 kg	

### Cutout

diameter 116 mm	
min. ceiling thickness 12.5 mm	
max. ceiling thickness 25 mm	
recessed depth 130 mm	

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

### Installation instructions



### Lighting calculator

