

# SASSO PRO 80 adjustable offset trim round

048-2312537M 052-1932328



Project / Type

Notes

Count / Date



### General

Ceiling , Recessed

tilt max 35°

rotation 360°

white , RAL 9016 <sup>1</sup>

Mounting set jet black

IP20

1050 lm

### LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 89 , R<sub>f(1-15)</sub>: 89

MR 0.56

MDER 0.51

### Optical

medium

beam angle 26°

P<sub>stLM</sub> ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

DALI-2

220-240 V

system 12.2 W

system 86 lm/W<sup>3</sup>

PC2

### Physical

trim

diameter 98 mm

height 83 mm

0.43 kg

### Cutout


diameter 92 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 130 mm

### Light distribution



### Product drawing

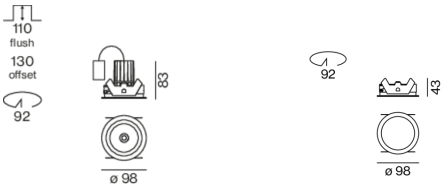

[‘048-2312537M 052-1932328’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · [www.xal.com](http://www.xal.com)