

SASSO PRO 80 adjustable flush trim round

048-2312637F 052-1922327



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

tilt max 35°

rotation 360°

white , RAL9016 ¹

Mounting set traffic white

IP20

1130 lm

LED

4000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 97 , R_r: 89 , R₍₁₋₁₅₎: 91

MR 0.85

MDER 0.77

Optical

flood

beam angle 37°

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

system 12.2 W

PC2 220-240V

system 93 lm/W³

inset 109 lm/W⁴

Physical

trim

diameter 98 mm

height 83 mm

0.44 kg

Cutout


diameter 92 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 110 mm

Light distribution



Product drawing

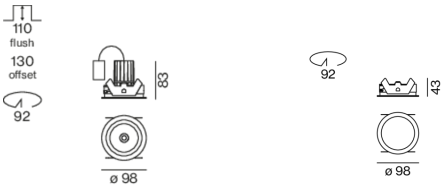

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

Installation instructions



Lighting calculator

