

SASSO PRO 80 adjustable

offset trimless

048-2310617M 052-1931327



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

tilt max 35° _____

rotation 360° _____

white , RAL9016 ¹ _____

Mounting set traffic white _____

IP20 _____

765 lm _____

LED

4000 K _____

CRI ≥ 90 _____

L90 / 50000 h _____

initial MacAdam ≤ 3 SDCM _____

R_g: 97 , R_r: 89 , R₍₁₋₁₅₎: 91 _____

MR 0.85 _____

MDER 0.77 _____

Optical

medium _____

beam angle 26° _____

P_{stLM} ≤ 1.0 ² _____

SVM ≤ 0.4 ² _____

Electrical

non DIM _____

8.3 W _____

PC2 220-240V _____

92 lm/W _____

inset 124 lm/W _____

Physical

trimless _____

length 87 mm _____

width 92 mm _____

height 83 mm _____

0.45 kg _____

Cutout

diameter 95 mm _____


min. ceiling thickness 12.5 mm _____

max. ceiling thickness 25 mm _____


recessed depth 130 mm _____

¹ RAL code ² Value of containing product at full load (undimmed)

Light distribution



Product drawing

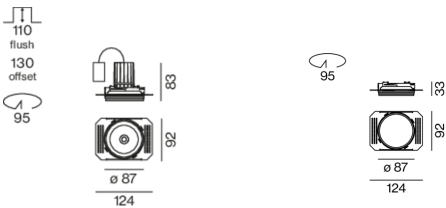

Installation instructions



Lighting calculator

