

SASSO PRO 80 adjustable

offset trimless

048-2312618M 052-1931328



Project / Type
Notes
Count / Date



General

Ceiling , Recessed
tilt max 35°
rotation 360°
black , RAL 9005 ¹
Mounting set jet black
IP20
1070 lm

LED

4000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 97 , R _r : 89 , R ₍₁₋₁₅₎ : 91
MR 0.85
MDER 0.77

Optical

medium
beam angle 26°
≥65° <3000 cd/m²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

non DIM
220-240 V
system 12.2 W
system 88 lm/W ³
PC2


Physical

trimless
length 87 mm
width 92 mm
height 83 mm
0.44 kg


Cutout

diameter 95 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 130 mm

Light distribution



Product drawing

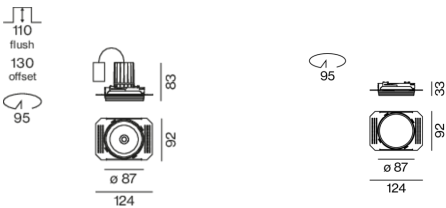

¹ RAL code ² Value of containing product at full load (undimmed)
³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator

