

# SASSO PRO 80 adjustable offset trim round

048-2310617F 052-1932328



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

tilt max 35°

rotation 360°

white , RAL9016 <sup>1</sup>

Mounting set jet black

IP20

773 lm

LED

4000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 97 , R<sub>r</sub>: 89 , R<sub>(1-15)</sub>: 91

MR 0.85

MDER 0.77

Optical

flood

beam angle 37°

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

Electrical

non DIM

system 8.3 W

PC2 220-240V

system 93 lm/W<sup>3</sup>

inset 125 lm/W<sup>4</sup>

Physical

trim

diameter 98 mm

height 83 mm

0.43 kg

Cutout


diameter 92 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 130 mm

## Light distribution



## Product drawing

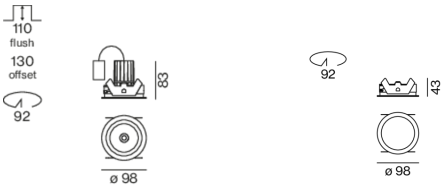

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses

## Installation instructions



## Lighting calculator

