

# SASSO PRO 80 adjustable

flush trimless

048-2310E38M 052-1921327



Project / Type
Notes
Count / Date



## General

Ceiling , Recessed
tilt max 35°
rotation 360°
black , RAL 9005 <sup>1</sup>
Mounting set traffic white
IP20
360 lm

## LED

colour warm dimming
1800 K - 2700 K
CRI ≥ 95
L80 / 50000 h
initial MacAdam ≤ 4 SDCM

## Optical

medium
beam angle 26°
UGR ≤ 19 , ≥65° <1500 cd/m <sup>2</sup>
PstLM ≤ 1.0 <sup>2</sup>
SVM ≤ 0.4 <sup>2</sup>

## Electrical

DALI-2
220-240 V
system 6.5 W
system 55 lm/W <sup>3</sup>
PC2

## Physical


trimless
length 87 mm
width 92 mm
height 83 mm
0.46 kg

## Cutout


diameter 95 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 110 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Light distribution



## Product drawing

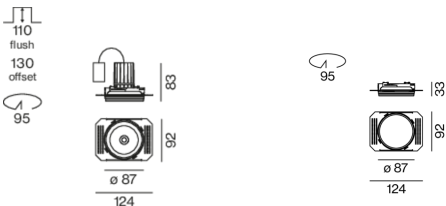

## Installation instructions



## Lighting calculator

